

# **M60**



# **MAIN OPTIONALS**



Fully adjustable third front brush that allows to sweep 180° left and right side.



Dumping at any height between 1,1 and 2,3 m.



Rear powerful wandering vacuum hose, 6 m lenght -140 mm diameter.



Side brush dust suppression skirts for dry dust-free sweeping.

## **M60 HS**



The M60 is the most advanced and performing mechanical-suction sweeper on the market today thanks to years of continuous development. Its 6 cubic meter hopper volume and 6000 Kg net payload are unmatched performances that allow this superb sweeper to work in the heaviest-duty conditions, both urban and industrial. The very large surface filters make the machine work dust-free even in the dustiest situations.

The **M60 HS** (**H**igh **S**peed) can comfortably reach a travelling speed of 70km/h with front wheels steering, while maintaining 4-wheel steering in working mode.

# CANBUS Controller Area Network Bus

IT IS AN ADVANCED SYSTEM THAT CONNECTS ALL THE MODULES WORKING THROU-GHOUT THE MACHINE SO THAT THEY CAN WORK TOGETHER TO RUN EFFECTIVELY AND EFFICIENTLY. IT IS HIGHLY RELIABLE AS COMING FROM THE AUTOMOTIVE SECTOR:

- FRONT/REAR HYDRO-PNEUMATIC "REACTIVE" SUSPEN-SIONS
- BRUSHES GROUND PRESSURE HYDRAULIC CONTROL, FOR WEAR REDUCTION
- AUTOMATIC CENTRAL BRUSH RAISE
- IN-CAB MONITOR WITH PARTIAL/TOTAL HOUR-COUNTER
  OF ALL MACHINE FUNCTIONS
- DIAGNOSTICS DIRECTLY DISPLAYED ON MONITOR
- REMOTE UPDATE OF AMY POSSIBILE SETTING VIA SIMPLE USB STICK OR NETWORK CABLE
- AQUISITION, DISPLAY AND RECORDING OF ANY OPERATION DATA



Very large volumes of dry collected waste. 6 m³ hopper and 6000 kg payload is the highest capacity on the market, allowing long working shifts.



Sweeping and climbing over 20% full-load. The 4-wheel steering gives the M60 excellent manoevrability in all working conditions.



Exclusive capability to sweep in unbalanced conditions (ex. sidewalks). The system allows to sweep on bumps with no operator's action



Spacious and comfortable cabin with 2 homologated seats and user-friendly controls.



Digital Display



Large retention dust filter to work dust-free in any situation, with filtration level available up to PM 1 (optional).

## MAIN TECHNICAL FEATURES M60 HS

#### **SWEEPING WIDTH**

with central roll-brush only	1300 mm
with central roll-brush and right-hand side brush	2000 mm
• with central roll-brush and 2 side brushes (standard)	2700 mm
• with central brush, 2 side brushes and 3rd front brush (opt)	3600 mm

#### HOPPER AND WATER TANK


Hopper volume	6 m <sup>3</sup>
Net payload	6000 kg
Hopper dumping height	1,1 m (opt÷2,30 m)
Water tank capacity (with optional water spraying system)	620 lt / (opt 1220 lt)


#### **ENGINE AND DRIVE SYSTEM**

Mercedes diesel engine Tier3 Intercooler	129 kW/173 Hp
Driving system	hydrostatic
Maximum speed	70 Km/h
Maximum gradient full load	>20%


#### **OTHER FEATURES**

All functions control	Electro-hydraulic
Min. Turning radius	4430 mm
Steering system	4-wheel power st.
Full load weight (without/with 3rd font brush)	13250/13400 Kg

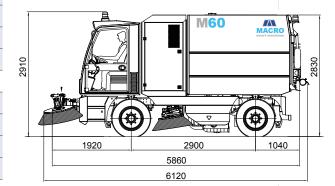





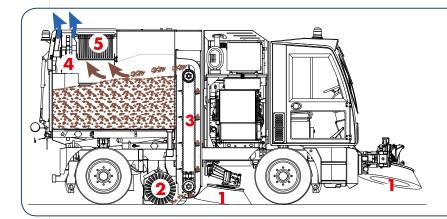

### **MECHANICAL-SUCTION SYSTEM**

The waste is collected by the mechanical action of the side (1) and central (2) brushes and the vertical loading conveyor (3). The suction (4) is only aimed at capturing the dust as soon as it's raised up from the floor. The suction is optimized to allow the full suppression of dusts thanks to large surface filter (5).

# **MACRO•CLEAN**

Stablished in 1991 Macro enjoys a long experience in steel fabrication, as well as in the manufacturing of cleaning ader in the production and sales of equipment for major international brands and of large sweepers. Inheriting and offers the widest range of mechanicaldeveloping Macro advanced technology suction sweepers from 0,3 to 6 m<sup>3</sup>.

along with RCM large organization, Macroclean has rapidly become a leroad and industrial sweepers and today

01/2019 rev. 07

MACROCLEAN S.r.l. ph. +39 0523 248636 www.macroclean.it info@macroclean.it