High Capacity Station (HC5)

Bigbelly's HC5 is a smart, solar-powered, compacting waste or recycling station. This compacting model holds 5-10X real capacity over an average traditional waste bin. It is equipped with sensors that monitor and report fullness levels and collection activity. It harvests solar power to compact waste and communicate its real-time status. The HC5's enclosed hopper (opening) design ensures total waste containment. This model maintains the durable, high quality and design integrity of all Bigbelly smart stations, and can be customized based on waste stream, options, and accessories.



BUILT-IN COMPACTOR



SOLAR POWERED



SMART STATION



FULLNESS SENSING





ONBOARD GPS



CELLULAR CONNECTION

Technical Specifications





Overall Machine Dimensions

Height: 49.8" (1264 mm)

Width: 25" (635 mm)

Depth: 26.8" (681 mm)

Handle Height (ADA Compliant): 43.1" (1095 mm)

Weight: 270 lbs (122 kg)

Shipping weight: 300 lbs (136.08 kg)

Hopper Opening: 6" x 17" (152 mm x 432 mm)

Bin Volume: 33 gallons (125 L) compacted trash;
 approx.150 gallons (568 L) uncompacted trash.

 Bin Dimension: 24" x 20.4" x 21.65" (609 mm x 518 mm x 549 mm)

Waste Streams: Mixed Waste Trash, Single Stream Recycling, or Compost (with appropriate markings).

Options: Diagram to left shown with Foot Pedal. See options and accessories on next page.

High Capacity Station (HC5)

Smart, Solar-Powered, Compacting Model (150 Gal / 570 L)





High Capacity Station (HC5)

Smart, Solar-Powered, Compacting Model (150 Gal / 570 L)





www.bigbelly.com | info@bigbelly.com +1-781-444-6002 | © 2018 Bigbelly, Inc.

Technical Specifications - Continued

HC5 Features

- Unique built-in compaction technology with up to 5-to-1 compaction ratio
- Fully automated, microprocessor controlled system senses fullness and machine status
- Embedded sensors read and report fullness levels, collection activity into integrated software platform
- Ideal waste flow with 70° hopper dump angle and significant compaction penetration (travels to 9" from bottom of bin)
- Hopper Sensor alerts when hopper is jammed open & logs a count of hopper openings in CLEAN
- · LED status lamps indicate readiness to collect (fullness level or age of waste), machine status and error codes
- 4G LTE wireless data link for remote monitoring and management
- GPS assisted location service

Safety Features

- CE approved
- Double fault-tolerant design for hopper insertion door prevents access to compaction area;
- Physical barrier between users and moving compactor
- Fully interlocked access doors protect users and service personnel; Separately keyed service access
- · Locked front trash removal door
- Dampened hopper opening with use of foot pedal
- · No pinch points, sharp edges or corners

Durability

- Weather resistant, UV stabilized polyester powder-coat finish on all exterior parts
- Electronic components temperature range of -40°F to +185°F (-40°C to +85°C)
- Fully weatherized, but in the event of a flood, HC5 can withstand:
 - Up to 20" (508 mm) of water without harming the electronics
 - Up to 36" (915 mm) of water with only minor damage to electronics

Opening (Hopper) Options







PLEASE NOTE: Green Hoppers require additional 6 weeks to process.

Black / Trash Blue / Recycle Green

le Green / Compost

Materials

- RoHS compliant
- Galvanized sheet metal steel interior and exterior construction
- Heavy duty plastic side panels for dent and scratch resistance (recycled content)
- Interior Bin: Leak proof; made of low density polyethylene (LDPE) plastic

Power & Electronics


- Patented Skip-a-Cycle[™] energy management technology ensures performance in any location, including shade and cloud cover; Average operation uses less than 3wh energy per day
- 28Ah Extended Life Battery with Insulation for Optimized Performance (average: 5-8 years)
- Polycrystalline silicon cell PV module (22 watts)
 - 40 watts HE (high energy) upgrade available
- PV panel protected by polycarbonate bubble
- · Spill-proof, sealed maintenance-free battery
- Self-powered unit requires no wiring

Options & Accessories


- Foot Pedal for Hands-Free Use
- · Wheeled Interior Lift Bin (Bar & Comb Styles)
- · Graphic Wraps, Message Panels, Stickers
- Ashtray and Stub-out Plates
- Security System with Physical Plates
- External A/C Adapter for Indoor Use
- Standalone Wi-Fi Hotspot Upgrade Option

Multi-Stream Configurations


Stations are modular and support any combination of waste streams at each location as **Single, Double, and Triple** station configurations. A fleet may be comprised of a variety of stations in order to meet the unique needs of each area. Customize each station by selecting components' **capacity** (HC5 or SC5.5) and **waste stream** (Trash, Single Stream / Paper / Bottles & Cans Recycling, or Compost/Organics; see next page for available streams per model).

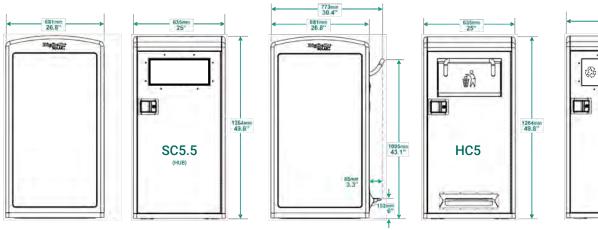

HC5 Single Station Approximately 270 lbs (122 kg)




SC5.5/SC5.5 Double Station Approximately 294 lbs (133 kg)




SC5.5 Single Station

Approximately 150 lbs (68kg)

HC5/SC5.5 Double Station Approximately 414 lbs (188 kg)



HC5/HC5 Double Station Approximately 540 lbs (245 kg)



HC5/SC5.5/SC5.5 Triple Station Approximately 558 lbs (253 kg)

Multi-Stream Configurations

Mix & Match for Station Capacity and Waste Stream







Multi-Stream Configurations

Mix & Match for Station Capacity and Waste Stream







Technical Specifications

	High Capacity Station (HC5)	Standard Capacity Station (SC5.5) Hub	Standard Capacity Station (SC5.5) Companion
Overall Dimensions	Smart, Solar-Powered, Compacting Model	Smart, Self-Powered, Non-Compacting Model	Smart, Self-Powered, Non-Compacting Model
Height	49.8" (1264 mm)	49.8" (1264 mm)	49.8" (1264 mm)
Width	25" (635 mm)	25" (635 mm)	25.6" (635 mm)
Depth	26.8" (681 mm)	26.8" (681 mm)	26.8" (681 mm)
Handle Height	43.1" (1095 mm)	With Hopper: 43.1" (1095 mm)	With Hopper: 43.1" (1095 mm)
Weight	270 lb (122 kg)	150 lb (68 kg)	144 lb (65 kg)
Shipping Weight	300 lb (136 kg)	180 lb (82 kg)	176 lb (80 kg)
Battery Voltage	12V	4.5V	-
Insertion Opening	6" x 17" (15.2 cm x 43.2 cm)	Can be configured for multiple recycling or waste streams.	Can be configured for multiple recycling or waste streams.
Bin Volume	33 gallons (125 L) compacted; 150 gallons uncompacted	50 gallons (189 L)	50 gallons (189 L)
Liner Bags	Custom High Capacity Liner Bags (#BBS-CB4647 or #BBS-RCB4647) are available for purchase.	Custom Standard Capacity Liner Bags (#BBS-RB4255) are available for purchase.	Custom Standard Capacity Liner Bags (#BBS-RB4255) are available for purchase.
	The black or clear bags are 47"H x 46"W (120cm x 117cm) and 2.5mil (64µ) thick.	The clear bags are 55″H x 42.5″W (140cm x 108cm) and 1.25mil (32µ) thick.	The clear bags are 55″H x 42.5″W (140cm x 108cm) and 1.25mil (32µ) thick.

Liner Bags are available from Bigbelly's official provider, WasteZero. Contact WasteZero to order liner bags at +1.800.866.3954 or www.WasteZero.com/Bigbelly/.

Opening Options

Enclosed Hopper (HC5, SC5.5)











Open Faceplate (SC5.5)











Landfill Recycling Waste

Landfill Single Waste Stream Recycling

Paper Recycling

Bottle & Cans Recycling

PLEASE NOTE: Green Hoppers require additional 6 weeks to process.